

## DS-2TE127-G4A Black Body



As a standard radiation source, black body has been widely used for calibrating infrared light system, measuring material emissivity, measuring parameters of infrared sensor, and transmitting temperature between infrared emitter and thermal device.

DS-2TE127-G4A is mainly used for the calibration of thermographic device. It helps to measure the temperature in high accuracy.

### Key Feature


- Supports calibration of thermal device in high accuracy
- Supports different temperature settings
- High accuracy and good stability
- Easy temperature calibration and correction
- Strong ability of anti-interference



## Specification

| Parameter                |   |
|--------------------------|---|
| Temperature Range        | Environment Temperature+5 °C (9 °F), up to 50°C (122 °F)      |
| Effective Radiating Area | 70 mm ×70 mm (2.76" × 2.76")                                  |
| Temperature Resolution   | 0.1 °C (0.18 °F)  |
| Temperature Accuracy     | ± 0.1 °C (0.18 °F)  |
| Temperature Stability    | ± 0.1 °C/h  |
| Effective Emissivity     | 0.97 ± 0.02   |
| Power Consumption        | 20 W  |
| Environment Temperature  | 0 °C to 40°C (32 °F to 104 °F)                                |
| Weight                   | 1.85 Kg (4.08 lb)   |
| Dimension                | 120 mm × 176.6 mm × 119.6 mm (4.72" × 6.95" × 4.71")          |
| Power                    | 100 VAC to 240 VAC  |
| Mounting                 | Mounting on a plane desk or a tripod with 1/4-20UNC Interface |

## Dimension

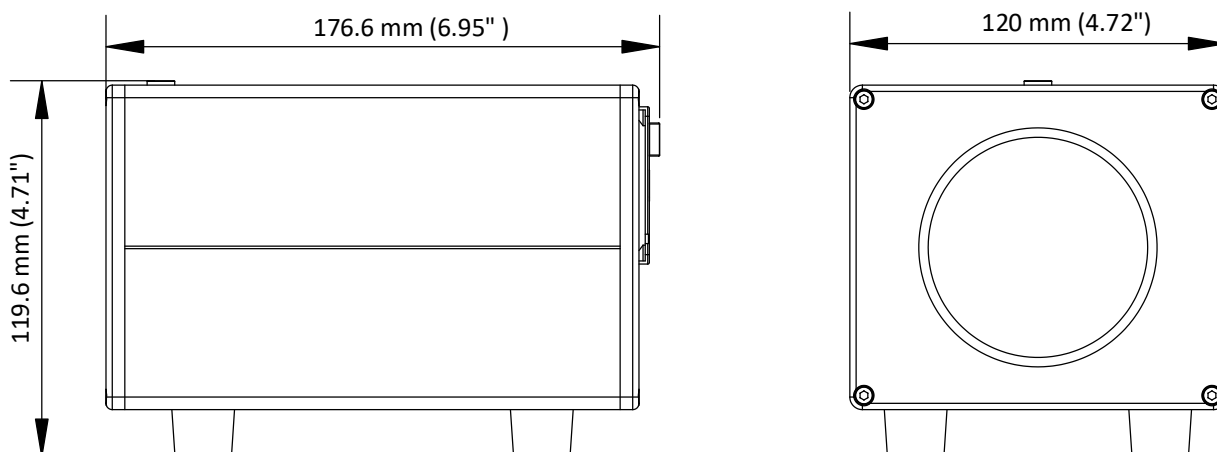

## Available Model

DS-2TE127-G4A

Distributed by

**CT-AV**

Dé audiovisuele inrichters

Hoefsmidstraat 44a  
3194 AA Hoogvliet

**T** +31 (0)10 438 58 59  
**W** [www.CT-AV.nl](http://www.CT-AV.nl)